

**Anchor channel HAC-60**



**Base materials**

- Concrete (cracked)
- Concrete (uncracked)

**Applications**

- Fastening curtain wall brackets
- For the installation of guide rails and doors in elevator installation
- Fastening guide rails for elevators and counterweights

**Advantages**

- Innovative V-shape provides high load resistance and close edge distances
- New type of protective, environmentally friendly foam insert (LDPE) and end caps seal the channel effectively, preventing concrete slurry from entering the channel
- Foam insert features tear-out strip for trouble-free removal (avoids damage to the channel through use of drill bits, hammers or gas torches)


**Technical data**

<b>Anchor type</b>	Anchor channel
<b>Material, corrosion</b>	Steel, sherardized / hot-dip galvanized
<b>Width</b>	43 mm
<b>Height</b>	36 mm

**Approvals**

ETA	ETA-11/0006 for HAC (ETAG -, Option -)
Fire resistance	
Fatigue	

Approvals and test reports may apply to selected products only. Please refer to the documents for details.

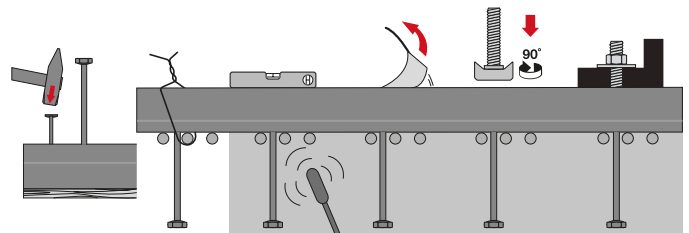

These are abbreviated instructions which may vary by application. Always review/follow the instructions accompanying the product or refer to [www.hilti.com/techlib](http://www.hilti.com/techlib).

Ordering designation	Length	Number of anchors	Anchor distance	Sales pack quantity	Item number
HAC-60 148/300 F	300 mm	2	250 mm	1 pc	431850 <sup>1)</sup>
HAC-60 148/350 F	350 mm	3	150 mm	1 pc	431851 <sup>1)</sup>
HAC-60 148/450 F	450 mm	3	200 mm	1 pc	431852 <sup>1)</sup>
HAC-60 148/550 F	550 mm	3	250 mm	1 pc	431853 <sup>1)</sup>

<sup>1)</sup> This is a non-stock item. For detailed lead time information please contact your Hilti representative.

Please visit our website for the latest item numbers and related products.